

DV audio Volume Controller

(Please read the explanation before use or fix it!)

Technology information:


Model	P-30	P-100
Line input	100V	100V
Input Power	30W	100W
Type	Transformer	Transformer
Attenuation Positions	11	11
Material	ABS	ABS
24V input	/	/
Material	Flush and surface	
Accessory	M3.5X2.0Screw.....2	

Note: "F" stand for switching


Installation steps :

1. Install the box in the appropriate position and lead the music signal wire to the box.
2. Take out the volume controller and connect the cabling on its rear panel. Make sure the cabling is secure.
3. Remove the panel frame of the volume controller and tighten the screw in correct position.
4. Put the panel frame back to the volume controller to finish the installation.

Product size

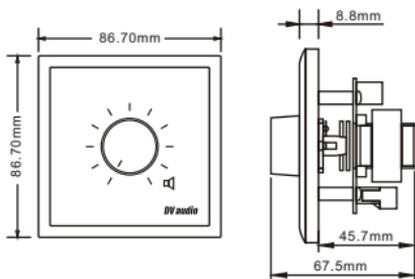

Line Connection:

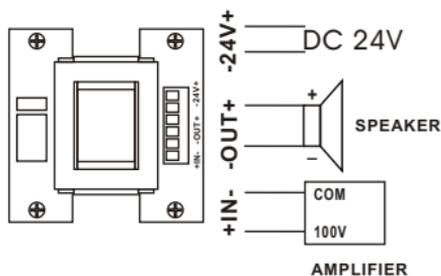

Attention:

The useable wire should be IV and HIV type, whose diameter is 0.8-1.4mm, with crossection acreage is 0.5-1.5mm² criterion wire .The signal is input into IN+ and IN- when playing music. When direct current 24V signal input ,not be controlled by volume controller.