

# DH-S4101-16ET2GF-240-C

18-Port Cloud Managed Switch with 16-Port PoE

## PoE 2.0



### System Overview

Cloud Managed Switch is a layer-2 commercial switch that has a long-distance PoE function. It can supply power to devices up to 250 meters away. The PoE red port supplies up to 90W. The Switch can be managed through the DoLynk Care app, allowing you access to the network topology diagram function, which can be used to quickly identify issues. The DoLynk Care app is developed based on DoLynk Care Cloud Server. The Switch is applicable for use in a wide variety of scenarios, such as in homes, factories and offices.

### Functions

#### Network topology Visualization

Supports LLDP protocol and automatically generating the network topology to quickly identify issues.

#### Cloud Management

You can operate and maintain the switch on the app of the mobile terminal, greatly reducing the cost of operation and maintenance.

#### Long Distance PoE

The transmission distance of a PoE port can be up to 250 m, meeting the requirement of wired transmission (bandwidth reduced to 10 Mbps).

- Supports visualized management and remote maintenance.
- Supports automatic network topology generation.
- 250 m long-distance power supply.
- 8-pin PoE offers better compatibility and reduces cable loss.
- PoE watchdog monitors the status of terminals in real-time.
- Supports the power management policy.



#### Red Port 90W

The red ports support IEEE802.3af, IEEE802.3at, IEEE802.3bt and Hi-PoE standards, with a maximum output power consumption of 90W per port. Suitable for powering high-power devices.

#### PoE Watchdog

It enables the switch to automatically detect port status and restart the failed ports to recover connection in case of IPC connection exception. This enables intelligent operation and maintenance management in its true sense and effectively reduces manual maintenance costs.

#### Scene

Suitable for scenarios such as households, offices, and factories.

## Technical Specification

### Hardware

Included Power Adapter	Yes
PoE	Yes
Ethernet Port	16
Ethernet Port Speed	10/100 Mbps
Optical Port Uplink Speed	1 Gbps
Description of Function Slots	Port 1–16: 16 × RJ-45 10/100 Mbps Port 17-18: 2 × 10M/100M/1000M Base-T (uplink) (combo) Port 17-18: 2 × 1000M SFP (uplink)(combo)
Power Supply	100–240 VAC, 50/60 Hz, 2 A
Operating Temperature	–10 °C to +55 °C (+14 °F to +131 °F)
Operating Humidity	5%–95% (RH), non-condensing
Storage Temperature	–40 °C to +70 °C (–40 °F to +158 °F)
Storage Humidity	5%–95% (RH), non-condensing
Power Consumption	Idling: ≤5 W Full: 240 W

### Performance

Smart Managed Switch	Yes
MTBF	371,069 h
Switching Capacity	7.2 Gbps
Packet Forwarding Rate	5.36 Mpps
Packet Buffer Size	4 Mbit
MAC Table Size	16K

### PoE

PoE Protocol	IEEE802.3af; IEEE802.3at; Hi-PoE; IEEE802.3bt
PoE Power	Port 1–2 ≤90 W; Port 3–16 ≤30 W; Total ≤240 W
PoE Power Consumption Management	Yes
PoE Pin Assignment	1, 2, 4, 5 (V+), 3, 6, 7, 8(V–)
Long Distance PoE Transmission	Yes

### General

Statics Protection	Air discharge: 8 kV Contact discharge: 6 kV
Lighting Protection	Common mode: 4 kV Differential mode: 2 kV
Net Weight	3.20 kg (7.05 lb)
Gross Weight	4.30 kg (9.48 lb)
Product Dimensions	440 mm × 300 mm × 44 mm (17.32" × 11.81" × 1.73") (L × W × H)

Packaging Dimensions	528 mm × 412 mm × 112 mm (20.79" × 16.22" × 4.41") (L × W × H)
Certifications	CE; FCC

## Transmission Performance:

Switch power supply voltage 53V.  
CAT5E/CAT6. Max. DC resistance < 10Ω/100m

Cable(m)	Load Capacity(W)	Bandwidth(Mbps)
IEEE802.3bt 90W		
100	71.3	100
150	62	10
200	51	10
250	40	10

### Hi-PoE 60W

100	53	100
150	50	10
200	47	10
250	37	10

### IEEE802.3at 30W


100	25.5	100
150	25.5	10
200	25.5	10
250	25.5	10

Note: Data from this table was collected by Dahua test lab and is for reference only. The actual transmission distance may vary due to power consumption of connected devices or the cable type and status.

## Ordering Information

Type	Model	Description
SFP module	GSFP-1310T-20-SMF	1.25G 1310/1550nm,20km,LC, Single-mode
	GSFP-1310R-20-SMF	1.25G 1550/1310nm,20km,LC, Single-mode
	GSFP-1310-20-SMF	1.25G 1310nm,20km,LC, Single-mode
	GSFP-850-MMF	1.25G 850nm,550m,LC, Multi-mode

## Dimensions (mm[inch])

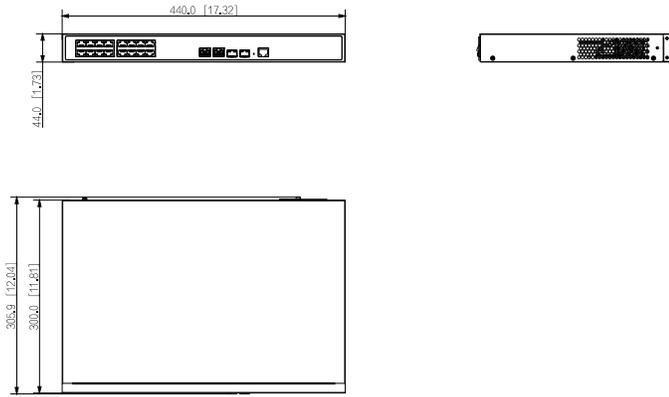

## Panels

