


## YOUR WI-FI HAS AN AUDIENCE

Who said you should hide your router in the closet? Bring it out in the open and enjoy faster and smoother signal in your whole home. A router for those who value both beauty and functionality.

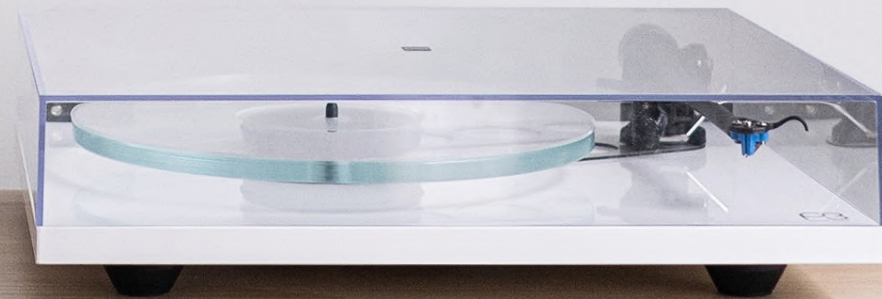

# STRONG CONNECTION EVERYWHERE

Wi-Fi has to be fast, reliable, easy to manage, it must reach every room and every corner. That is exactly what Audience devices can deliver in grand style – even in the biggest houses!

Audience is a tri-band (one 2.4 GHz & two 5 GHz ) home access point with LTE support and meshing technology. If you need Wi-Fi in a huge building with all kinds of obstacles, simply add more Audience devices to your network – with a press of a button they will sync seamlessly and create a single Wi-Fi network to cover the whole premises. The initial setup is also very simple – download the iOS or Android MikroTik app, it will connect to the router and guide you through a quick setup process.

In some cases a single Audience unit might be able to replace several other routers – in our tests it covered 1858 m<sup>2</sup> (20000 square feet) easily. It depends on the amount of obstacles, Wi-Fi clients and interference, so results may vary.



## ENJOY THE FREEDOM OF LTE

Cables can no longer limit you. CAT6 LTE delivers speed up to 300 Mbps with low latency, so having a traditional Ethernet connection is not a must-have for streaming high-quality videos or gaming. Alternatively, you can use the two Gigabit Ethernet ports and keep the LTE option for backup. One of the Ethernet ports supports PoE for powering the device.

Dual-chain 2.4 GHz and 5 GHz wireless coverage will solve most interference issues in a crowded environment. For example, you can simultaneously use the 2.4 GHz channel for all your household mobile devices and reserve the 5 GHz channel for your PC or TV.

Order your Audience today and start living in the future.  
The future of easy and elegant networking.



MikroTik

## General specifications

Product code	RBD25G-5HPacQD2HPnD, RBD25GR-5HPacQD2HPnD&R11e-LTE6		
CPU	4 core IPQ-4019 716 MHz		
Size of RAM	256 MB		
Storage	128 MB NAND, 2 MB flash		
10/100/1000 Ethernet ports	2		
Wireless*	2.4 GHz	5.18 - 5.3 GHz	5.5 - 5.85 GHz
Protocols	802.11b/g/n	802.11a/n/ac	802.11a/n/ac
Number of chains	2		4
Wireless antenna max gain	3.5 dBi	4.5 dBi	
Wireless regulations	Specific frequency range will be limited by country regulations		
Antenna beam width	360°		
Supported input voltage	DC jack 12 - 57 V		
PoE in	802.3af/at 24 - 57 V		
Dimensions	100 x 235 x 97 mm		
Operating temperature	-30°C .. +60°C		
Operating system	RouterOS, License level 4		
Max power consumption	27 W		

\*Audience's 5 GHz coverage is limited to 5180 – 5320 MHz, as it uses 5500 – 5825 MHz spectrum to communicate with other Audience devices.

## LTE model specifications

Product code	RBD25GR-5HPacQD2HPnD&R11e-LTE6
Micro SIM slots	1
MiniPCle slots	1
LTE category	6 (300 Mbps Downlink, 50 Mbps Uplink)
LTE antenna max gain	4 dBi (with u.FL connector)
LTE (FDD) bands	1(2100)/2(1900)/3(1800)/5(850)/7(2600)/8(900)/12(700)/17(700)/20(800)/25(1900)/26(850)
LTE (TDD) bands	38(2600)/39(1900)/40(2300)/41n(2500)
3G bands	1(2100)/2(1900)/5(850)/8(900)
2G bands	2(1900)/3(1800)/5(850)/8(900)

## Supported 2xCA LTE bands

1+1/5/8/20	2+2/5/12/17	3+3/5/7/8/20	7+7/8/12/20	8+8
12+12	38+38	39+39/41	40+40	41+41

## Wireless specifications

Rate (2.4 GHz)	Tx (dBm)	Rx (dBm)	Rate (5 GHz 5180 – 5320)	Tx (dBm)	Rx (dBm)
1MBit/s	26	-100	6MBit/s	28	-95
11MBit/s	26	-94	54MBit/s	25	-78
6MBit/s	29	-96	MCS0	28	-95
54MBit/s	26	-80	MCS7	24	-75
MCS0	29	-96	MCS9	22	-70
MCS7	25	-75			

Rate (5 GHz 5500 – 5825)	Tx (dBm)	Rx (dBm)
6MBit/s	32	-96
54MBit/s	28	-80
MCS0	32	-96
MCS7	27	-77
MCS9	25	-72

## Included parts



24 V 1.5 A  
power adapter



Ethernet cable