

**HUAWEI B535-232 LTE CPE  
V100R001  
Product Description**

**Issue**        01  
**Date**         2019-05-23

**Copyright © Huawei Technologies Co., Ltd. 2019. All rights reserved.**

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

## **Trademarks and Permissions**



HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

## **Notice**

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

## **Huawei Technologies Co., Ltd.**

Address: Huawei Industrial Base  
Bantian, Longgang  
Shenzhen 518129  
People's Republic of China

Website: <http://consumer.huawei.com/en/>

Email: [mobile@huawei.com](mailto:mobile@huawei.com)

# About This Document

## Summary

This document provides information regarding the features, main functions and services, technical specifications, and technical references of the product.

This document includes:

| Chapter                                     | Details   |
|---|---|
| 1 Product Overview                          | Provides an overview of the product.  |
| 2 Technical Specifications                  | Describes the specifications of the product hardware, software, and user interface. |
| 3 Services and Applications                 | Describes the main functions and applications of the product.                       |
| 4 System Structure and Scenario Constraints | Describes the product system structure.   |
| 5 Technical References                      | Describes the standards and communication protocols of the product.                 |
| 6 Packing List                              | Describes the devices and accessories that comprise the product package             |



### NOTE

The document is an invitation to offer but not an offer. It is intended to describe the general features and functions of a product. The features and functions of certain products may vary with the requirements of customers.

## History

| Issue | Date       | Details                   |
|-------|------------|---------------------------|
| 01    | 2019-05-23 | Initial official release. |

## Acronyms and Abbreviations

| Acronym or Abbreviation | Full Spelling                                      |
|-------------------------|--|
| 3GPP                    | 3rd Generation Partnership Project                 |
| ACS                     | Auto Configuration Server                          |
| AES                     | Advanced Encryption Standard                       |
| ALG                     | Application Layer Gateway                          |
| AMR-NB                  | Adaptive Multi-Rate compression - Narrowband       |
| AMR-WB                  | Adaptive Multi-Rate compression - Wideband         |
| AP                      | Access Point                                       |
| APN                     | Access Point Name                                  |
| ARP                     | Address Resolution Protocol                        |
| CLAT                    | Customer-side Translator                           |
| CPE                     | Customer Premises Equipment                        |
| CS                      | Circuit Switched                                   |
| CSFB                    | Circuit Switched Fallback                          |
| DBDC                    | Dual Band Dual Concurrent                          |
| DC-HSPA+                | Dual-Carrier - High Speed Packet Access Evolution  |
| DHCP                    | Dynamic Host Configuration Protocol                |
| DL                      | Downlink   |
| DMZ                     | Demilitarized Zone                                 |
| DNS                     | Domain Name Server                                 |
| DTMF                    | Dual-Tone Multi-Frequency                          |
| EDGE                    | Enhanced Data rates for Global Evolution           |
| E-UTRA                  | Evolved Universal Terrestrial Radio Access Network |
| FDD                     | Frequency Division Duplex                          |
| HOTA                    | Huawei Firmware Over the Air                       |
| HSPA                    | High Speed Packet Access                           |
| HSPA+                   | High Speed Packet Access Evolution                 |
| GPRS                    | General Packet Radio Service                       |
| IEEE                    | Institute of Electrical and Electronics Engineers  |
| IP                      | Internet Protocol                                  |

| Acronym or Abbreviation | Full Spelling                                     |
|-------------------------|---|
| IPSec                   | Internet Protocol Security                        |
| IPv4                    | Internet Protocol version 4                       |
| IPv6                    | Internet Protocol version 6                       |
| ICMP                    | Internet Control Message Protocol                 |
| L2TP                    | Layer Two Tunneling Protocol                      |
| LAN                     | Local Area Network                                |
| LED                     | Light Emitting Diode                              |
| LTE                     | Long Term Evolution                               |
| MAC                     | Media Access Control                              |
| MDI                     | Medium Dependent Interface                        |
| MDIX                    | Medium Dependent Interface Crossover              |
| MIMO                    | Multi-input Multi-output                          |
| MME                     | Mobility Management Entity                        |
| NAT                     | Network Address Translation                       |
| NAPT                    | Network Address and Port Translation              |
| PC                      | Personal Computer                                 |
| PCC                     | Primary Component Carrier                         |
| PGW                     | PDN Gateway                                       |
| PIN                     | Personal Identification Number                    |
| PLAT                    | Provider-side Translator                          |
| PPTP                    | Point-to-Point Tunneling Protocol                 |
| QAM                     | Quadrature Amplitude Modulation                   |
| QR                      | Quick Response                                    |
| RFC                     | Request For Comments                              |
| RTCP                    | Real-time Transport Control Protocol              |
| RTP                     | Real-time Transport Protocol                      |
| SAMBA                   | System for Advanced Mobile Broadband Applications |
| SCC                     | Secondary Component Carrier                       |
| SCP                     | Service Control Point                             |
| SDRAM                   | Synchronous Dynamic Random Access Memory          |
| SDP                     | Session Description Protocol                      |

| Acronym or Abbreviation | Full Spelling   |
|-------------------------|---|
| SGW                     | Serving Gateway   |
| SIP                     | Session Initiation Protocol                                       |
| SMA                     | SubMiniature version A  |
| SMS                     | Short Message   |
| SOHO                    | Small Office Home Office  |
| SSID                    | Service Set Identifier  |
| TDD                     | Time Division Duplex  |
| TD-SCDMA                | Time Division-Synchronous Code Division Multiple Access           |
| TKIP                    | Temporal Key Integrity Protocol                                   |
| UE                      | User Equipment  |
| UL                      | Uplink  |
| UMTS                    | Universal Mobile Telecommunications System                        |
| UPnP                    | Universal Plug and Play   |
| USB                     | Universal Serial Bus  |
| USIM                    | UMTS Subscriber Identity Module                                   |
| VPN                     | Virtual Private Network   |
| WAN                     | Wide Area Network   |
| WEP                     | Wireless Encryption Protocol                                      |
| Wi-Fi                   | Wireless Fidelity   |
| WMM                     | Wi-Fi Multimedia  |
| WPA/WPA2-PSK            | Wi-Fi Protected Access/Wi-Fi Protected Access II - Pre-Shared Key |
| WPA2-PSK                | Wi-Fi Protected Access II - Pre-Shared Key                        |
| WPS                     | Wi-Fi Protected Setup   |

---

# Contents

---

|  |           |
|--|-----------|
| <b>About This Document</b> .....                               | <b>ii</b> |
| <b>1 Product Overview</b> .....                                | <b>1</b>  |
| <b>2 Technical Specifications</b> .....                        | <b>3</b>  |
| 2.1 Hardware Specifications .....                              | 3         |
| 2.2 Antenna Specifications .....                               | 6         |
| 2.2.1 Build-in LTE Antenna.....                                | 6         |
| 2.2.2 Build-in Wi-Fi Antenna .....                             | 7         |
| 2.3 Software Specifications .....                              | 8         |
| <b>3 Services and Applications</b> .....                       | <b>11</b> |
| 3.1 Data Services .....  | 11        |
| 3.1.1 Accessing the Internet through a Mobile Network .....    | 11        |
| 3.1.2 Accessing the Internet through an Ethernet Network ..... | 12        |
| 3.2 SMS .....  | 12        |
| 3.3 Security Service .....                                     | 12        |
| 3.3.1 Firewall Service .....                                   | 13        |
| 3.3.2 MAC Filtering .....                                      | 13        |
| 3.3.3 Wi-Fi Authentication.....                                | 13        |
| 3.4 VPN Function .....   | 13        |
| 3.4.1 VPN Client.....  | 13        |
| 3.4.2 VPN Pass-Through .....                                   | 13        |
| 3.5 IP Pass-Through.....                                       | 14        |
| 3.6 IPv6 Only and IPv4v6 Dual Stack .....                      | 14        |
| 3.6.1 IPv4v6 Dual Stack .....                                  | 14        |
| 3.6.2 IPv6 Only (CLAT) .....                                   | 14        |
| 3.7 Multi-APN .....  | 15        |
| 3.8 HiLink.....  | 15        |
| 3.9 Customer management .....                                  | 15        |
| 3.9.1 WebUI.....   | 15        |
| 3.9.2 HUAWEI SmartHome APP .....                               | 15        |
| 3.10 Operator maintenance .....                                | 15        |
| 3.11 HOTA.....   | 16        |

---

|   |           |
|---|-----------|
| <b>4 System Structure and Scenario Constraints.....</b>                       | <b>17</b> |
| 4.1 System Architecture.....  | 17        |
| 4.2 Scenario Constraints .....  | 18        |
| <b>5 Technical References.....</b>  | <b>19</b> |
| 5.1 Standards and Communication Protocols .....                               | 19        |
| 5.1.1 Standards and Communication Protocols of the Product.....               | 19        |
| 5.1.2 Standards and Communication Protocols of the Wireless Uu Interface..... | 19        |
| <b>6 Packing List.....</b>  | <b>20</b> |



# 1 Product Overview

---

The HUAWEI LTE CPE B535-232 is a Long Term Evolution (LTE) wireless gateway for multiple users in household or small office environments. It enables users to access the Internet.

The B535-232 supports 3GPP Release 11 with LTE CAT 7. The supported service functions are as follows:

- Data service up to DL 300 Mbps and UL 100 Mbps
- Working band: LTE: B1/B3/B7/B8/B20/B28/B32/B38, UMTS: B1/B8
- Wi-Fi: 802.11 b/g/n/a/ac. 2.4GHz Wi-Fi 2x2 MIMO up to 300Mbps, 5GHz Wi-Fi 2x2 MIMO up to 867Mbps. Maximum Users: 64
- 1 GE port for LAN/WAN, 3 GE ports for LAN
- Multi APN function (Optional) for Data, TR-069 services
- Routing mode: NAT enable (Default) / IP pass-through (Optional)
- VPN client service (L2TP, PPTP)
- Customer management via WebUI or HUAWEI SmartHome APP (iOS or Android)
- Operator maintenance via TR-069 (Optional) and TR-143 (Optional)
- Huawei Firmware Over the Air (HOTA)

**Figure 1-1** B535-232 appearance




# 2 Technical Specifications

## 2.1 Hardware Specifications

**Table 2-1** Technical specifications of the B535-232 main unit

| Item                   | Description   |  |
|------------------------|---|--|
| Technical standard     | WAN   | 3GPP Release 11  |
|                        | LAN   | IEEE 802.3/802.3u  |
|                        | Wi-Fi   | IEEE 802.11a/b/g/n/ac  |
| Working band/frequency | LTE   | B1/B3/B7/B8/B20/B28/B32/B38  |
|                        | UMTS  | B1/B8  |
|                        | Wi-Fi   | 2.4 GHz: 2.4 GHz-2.473 GHz,<br>5 GHz: 5.15 GHz-5.35 GHz & 5.47 GHz-5.725 GHz |
| External port          | <ul style="list-style-type: none"><li>• One power adapter port</li><li>• One LAN/WAN port (RJ45), three LAN ports (RJ45)</li><li>• Two external LTE antenna ports (SMA)</li><li>• One SIM card slot (micro-SIM)</li></ul> |  |
| Antennas               | <ul style="list-style-type: none"><li>• Built-in LTE/UMTS primary antenna</li><li>• Built-in LTE/UMTS secondary antenna</li><li>• Built-in Wi-Fi 2.4 GHz antenna</li><li>• Built-in Wi-Fi 5.0 GHz antenna</li></ul>       |  |

| Item                   | Description  |  |              |            |            |             |             |             |
|------------------------|--|--|--------------|------------|------------|-------------|-------------|-------------|
| LED Indicators         | <ul style="list-style-type: none"> <li>• One power indicator</li> <li>• One Internet status indicator<br/>Cyan: LTE network accessed<br/>Blue: UMTS network accessed<br/>Green: Ethernet network accessed<br/>White: Dual uplink enabled (Customizable)<br/>Red: No SIM card is inserted or detected, or the SIM card has insufficient balance</li> <li>• One Wi-Fi indicator<br/>Flash slowly: A pairable HiLink device is detected.<br/>Flash quickly: HiLink pairing is in progress/WPS connection is in progress.<br/>Off: Wi-Fi is disabled.</li> </ul> <p> <b>NOTE</b></p> <ul style="list-style-type: none"> <li>• The indicator starts to flash slowly only when B535-232 detects a new HiLink device.</li> <li>• HiLink devices include Honor routers, Honor set-up boxes, Honor handsets (EMUI 5.0 and later), and more.</li> <li>• One LAN indicator</li> <li>• One group of signal strength indicators</li> </ul> |  |              |            |            |             |             |             |
| Buttons                | <ul style="list-style-type: none"> <li>• One Power ON/OFF switch</li> <li>• One Hi/WPS button <ul style="list-style-type: none"> <li>• The Wi-Fi indicator flashes slowly when the router detects a HiLink device. Press the Hi/WPS button to connect the HiLink device to the router's Wi-Fi.</li> <li>• When the Wi-Fi indicator is steady on, press the Hi/WPS button to enable WPS.</li> </ul> </li> <li>• One Reset button</li> </ul>   |  |              |            |            |             |             |             |
| Maximum transmit power | LTE  | B1/B8/B20/B28/B38: 22.5 dBm<br>B3/B7: 22 dBm   |              |            |            |             |             |             |
|                        | UMTS   | B1/B8: 22.5 dBm  |              |            |            |             |             |             |
|                        | Wi-Fi  | <ul style="list-style-type: none"> <li>• 802.11b: 14.5 dBm</li> <li>• 802.11g: 15.5 dBm</li> <li>• 802.11n: 15.5 dBm</li> <li>• 802.11a: 18 dBm</li> <li>• 802.11ac: 18 dBm</li> </ul> |              |            |            |             |             |             |
| Receiving sensitivity  | LTE  | Band   | 1.4MHz (dBm) | 3MHz (dBm) | 5MHz (dBm) | 10MHz (dBm) | 15MHz (dBm) | 20MHz (dBm) |
|                        |  | B1   | /            | /          | -100.5     | -98         | -96         | -95         |

| Item                     | Description  |   |        |        |       |       |       |  |
|--------------------------|--|---|--------|--------|-------|-------|-------|--|
|                          | B3   | -107.5  | -103.5 | -101.5 | -99.5 | -97.5 | -96.5 |  |
|                          | B7   | /   | /      | -97    | -95.0 | -92.5 | -91.5 |  |
|                          | B8   | -106.5  | -103.5 | -101.5 | -98.5 | /     | /     |  |
|                          | B20  | /   | /      | -101.5 | -98.5 | -97.5 | -95   |  |
|                          | B28  | /   | -103.5 | -101.5 | -99   | -97   | -95.5 |  |
|                          | B32  | /   | /      | -100   | -98   | -96   | -95   |  |
|                          | B38  | /   | /      | -100.5 | -97   | -95.5 | -94   |  |
|                          | UMTS   | <ul style="list-style-type: none"> <li>• B1: -110 dBm</li> <li>• B8: -110 dBm</li> </ul>  |        |        |       |       |       |  |
|                          | Wi-Fi  | <ul style="list-style-type: none"> <li>• 802.11b: -87 dBm</li> <li>• 802.11g: -75 dBm</li> <li>• 802.11n: -73.5 dBm</li> <li>• 802.11a: -76 dBm</li> <li>• 802.11ac: -75 dBm</li> </ul> |        |        |       |       |       |  |
| Power consumption        | < 12 W   |   |        |        |       |       |       |  |
| AC/DC power supply       | <ul style="list-style-type: none"> <li>• AC (input): 100V-240V 50Hz/60Hz</li> <li>• DC (output): 12V/1A</li> </ul>                                 |   |        |        |       |       |       |  |
| Dimensions (Maximum)     | 219 mm (Width) x 138 mm (High) x 25.6 mm (Deep)(not included the socket)<br>219 mm (Width) x 138 mm (High) x 60.66 mm (Deep)( included the socket) |   |        |        |       |       |       |  |
| Weight                   | About 325 g (excluding the power adapter)  |   |        |        |       |       |       |  |
| Temperature              | <ul style="list-style-type: none"> <li>• Working temperature: 0 °C to 40 °C</li> <li>• Storage temperature: -20 °C to +70 °C</li> </ul>            |   |        |        |       |       |       |  |
| Humidity                 | 5% – 95% (non-condensing)  |   |        |        |       |       |       |  |
| Certification/Compliance | CE<br>Wi-Fi<br>ERP<br>ROHS<br>REACH<br>GCF   |   |        |        |       |       |       |  |

## 2.2 Antenna Specifications

### 2.2.1 Build-in LTE Antenna

**Table 2-2** LTE antenna specifications

| Item                         | Description   |
|------------------------------|---|
| Frequency                    | <p>FDD LTE</p> <ul style="list-style-type: none"> <li>• B1: 1920-1980 MHz 2110-2170 MHz</li> <li>• B3: 1710-1785 MHz 1805-1880 MHz</li> <li>• B7: 2500-2570 MHz 2620-2690 MHz</li> <li>• B8: 880-915 MHz 925-960 MHz</li> <li>• B20: 832-862 MHz 791-821 MHz</li> <li>• B28: 703-748 MHz 758-803 MHz</li> <li>• B32: NA 1452-1496 MHz</li> </ul> <p>TDD LTE</p> <ul style="list-style-type: none"> <li>• B38: 2570-2620 MHz 2570-2620 MHz</li> </ul> <p>UMTS</p> <ul style="list-style-type: none"> <li>• B1: 1920-1980 MHz 2110-2170 MHz</li> <li>• B8: 880-915 MHz 925-960 MHz</li> </ul> |
| Input impedance              | 50 Ω  |
| Standing wave ratio          | < 3   |
| Main antenna efficiency      | <p>LTE</p> <ul style="list-style-type: none"> <li>• B1: -1.5 dB</li> <li>• B3: -1.4 dB</li> <li>• B7: -1.7 dB</li> <li>• B8: -2.6 dB</li> <li>• B20: -2.1 dB</li> <li>• B28: -2.5 dB</li> <li>• B32: -2.6 dB</li> <li>• B38: -1.8 dB</li> </ul> <p>UMTS</p> <ul style="list-style-type: none"> <li>• B1: -1.5 dB</li> <li>• B8: -2.6 dB</li> </ul>  |
| Diversity antenna efficiency | <p>LTE</p> <ul style="list-style-type: none"> <li>• B1: -2.3 dB</li> <li>• B3: -2.2 dB</li> <li>• B7: -2.5 dB</li> <li>• B8: -3.1 dB</li> <li>• B20: -2.7 dB</li> </ul>   |

| Item                   | Description  |
|------------------------|--|
|                        | <ul style="list-style-type: none"> <li>• B28: -3.2 dB</li> <li>• B32: -3.3 dB</li> <li>• B38: -2.3 dB</li> </ul> UMTS <ul style="list-style-type: none"> <li>• B1: -2.3 dB</li> <li>• B8: -3.1 dB</li> </ul> |
| Main antenna gain      | LTE <ul style="list-style-type: none"> <li>• B1/B3/B7/B8/B20/B28/B32/B38: 1~2 dBi</li> </ul> UMTS <ul style="list-style-type: none"> <li>• B1: 2 dBi</li> <li>• B8: 0.8 dBi</li> </ul>                       |
| Diversity antenna gain | LTE<br>B1/B3/B7/B8/B20/B28/B32/B38: 1~2 dBi  |
| TX/RX                  | 1T2R   |
| Polarization           | Linear polarization  |

## 2.2.2 Build-in Wi-Fi Antenna

**Table 2-3** Wi-Fi 2.4 GHz antenna specifications


| Item                | Description         |
|---------------------|---------------------|
| Frequency           | 2.4 GHz-2.473 GHz   |
| Input impedance     | 50 Ω                |
| Standing wave ratio | < 2                 |
| Efficiency          | -3 dB               |
| Gain                | 3.5 dBi             |
| Polarization        | Linear polarization |

**Table 2-4** Wi-Fi 5.0 GHz antenna specifications

| Item                | Description                            |
|---------------------|--|
| Frequency           | 5.15 GHz-5.35 GHz & 5.47 GHz-5.725 GHz |
| Input impedance     | 50 Ω                                   |
| Standing wave ratio | < 2                                    |
| Efficiency          | -3 dB                                  |
| Gain                | 3.5 dBi                                |
| Polarization        | Linear polarization                    |

## 2.3 Software Specifications

Table 2-5 Software specifications

| Item           | Description  |  |
|----------------|--|--|
| LTE features   | DL 2x2 MIMO  |  |
|                | DL 64QAM, UL 16QAM   |  |
| Mobile network | APN management<br>APN auto adapter   |  |
| Gateway        | Router   | <ul style="list-style-type: none"> <li>Supports the default route: 0.0.0.0.</li> <li>Supports manual configuration of LAN IP addresses.</li> <li>Supports Address Resolution Protocol (ARP).</li> </ul>  |
|                | DHCP server  | <ul style="list-style-type: none"> <li>The DHCP server can be enabled or disabled.</li> <li>The address pool of the DHCP server can be configured.</li> <li>The lease can be configured.</li> <li>The DNS relay under the DHCP server can be enabled.</li> </ul> |
|                | NAT  | <ul style="list-style-type: none"> <li>Supports NAT and NAPT (compliant with RFC2663, RFC3022, and RFC3027).</li> <li>Supports cone NAT.</li> <li>Supports Symmetric NAT.</li> </ul>   |
|                | ARP  |  |
|                | ICMP   |  |
|                | IPv4v6 dual stack<br>IPv6 only (Optional , CLAT for LAN side IPv4 device access Internet)<br>IPv4 only (Optional)  |  |
|                |  <b>NOTE</b><br>When the CLAT function is enabled, the IPv4 device Internet access service cannot reach the maximum throughput. Under IPv6 only, NAT-base service (such as port forwarding and port triggering) is not available. |  |
|                | VPN pass-through   |  |
| VPN client     | <ul style="list-style-type: none"> <li>Support L2TP VPN client</li> <li>Support PPTP VPN client</li> </ul>   |  |
| SMS            | <ul style="list-style-type: none"> <li>Writing/sending/receiving</li> <li>Writing/sending/receiving extra-long messages</li> </ul>   |  |



| Item                            | Description  |   |
|---------------------------------|--|---|
| Data service                    | LTE : DL 300 Mbps, UL 100 Mbps<br>DC-HSPA+: DL 42 Mbps, UL 5.76 Mbps<br>HSPA+: DL 21 Mbps (64QAM), UL 5.76 Mbps<br>HSPA: DL 14.4 Mbps, UL 5.76 Mbps<br>WCDMA PS: DL 384 Kbps, UL 384 Kbps  |   |
|                                 | Wi-Fi 802.11b/g/n/a/ac   |   |
|                                 | Supports multi APNs (Optional, one for data and one for TR-069).   |   |
| Firewall setup                  | <ul style="list-style-type: none"> <li>• Firewall enable/disable</li> <li>• URL filtering</li> <li>• LAN IP filtering</li> <li>• Port forwarding (Virtual server)</li> <li>• Port triggering (Special Application)</li> <li>• DMZ service</li> <li>• UPnP service</li> <li>• ALG settings</li> </ul> |   |
| LAN                             | <ul style="list-style-type: none"> <li>• 10/100/1000 Mbps auto-negotiation</li> <li>• MDI/MDIX auto-sensing</li> <li>• IEEE 802.3/802.3u-compatible</li> </ul>   |   |
| Wi-Fi                           | Broadcasts and hides service set identifiers (SSIDs)   |   |
|                                 | Complies with IEEE 802.11b/g/n/a/ac  |   |
|                                 | WPS  |   |
|                                 | WMM  |   |
|                                 | Encryption   | WEP, AES, and TKIP + AES  |
|                                 | Security mode  | <ul style="list-style-type: none"> <li>• Open</li> <li>• WPA2-PSK</li> <li>• WPA/WPA2-PSK</li> <li>• WEP</li> </ul>   |
|                                 | MAC address authentication   | <ul style="list-style-type: none"> <li>• Supports the MAC address authentication whitelist.</li> <li>• Supports the MAC address authentication blacklist.</li> <li>• Supports a maximum of 10 MAC address entries.</li> </ul> |
|                                 | STA  | <ul style="list-style-type: none"> <li>• Supports inquiry of STA status.</li> <li>• Supports a maximum of 64 connected stations.</li> </ul>   |
| Operator maintenance (Optional) | <ul style="list-style-type: none"> <li>• Supports TR-069 Amendment III</li> <li>• Supports TR-143 Amendment I</li> </ul>   |   |
| USIM                            | PIN management and USIM card authentication  |   |

| Item                | Description  |  |
|---------------------|--|--|
| NTP                 | Supports daylight saving time (DST) (Optional).  |  |
| Maintenance         | Supports export of current diagnosis results and operation logs.   |  |
| HUAWEI SmarHome APP | <ul style="list-style-type: none"> <li>• View data traffic usage and SMS.</li> <li>• Manage connected devices.</li> <li>• Change CPE's SSID and password.</li> </ul> |  |
| System requirements | Operating system   | Windows 7, Windows 8, Windows 8.1, Windows 10 (Not support Windows RT), MAC OS X 10.9, 10.10, 10.11 and 10.12 with latest updates.   |
|                     | Web browser  | <ul style="list-style-type: none"> <li>• Microsoft Internet Explorer 8.0 with latest updates.</li> <li>• FireFox 49.0 with latest updates.</li> <li>• All major versions of Chrome in the last year (53.0 with latest updates).</li> <li>• Safari 10.0 with latest updates (MACOS).</li> </ul> |
|                     | Your computer's hardware system should meet or exceed the recommended system requirements for the installed OS version.  |  |

# 3 Services and Applications


## 3.1 Data Services

The B535-232 can access the Internet through mobile networks and Ethernet networks. By connecting to the B535-232 using Wi-Fi or a network cable, users can obtain access to high-speed Internet services and establish a local area network (LAN).

### 3.1.1 Accessing the Internet through a Mobile Network

The B535-232 can access the Internet through mobile networks.


**Figure 3-1** Accessing the Internet through a mobile network

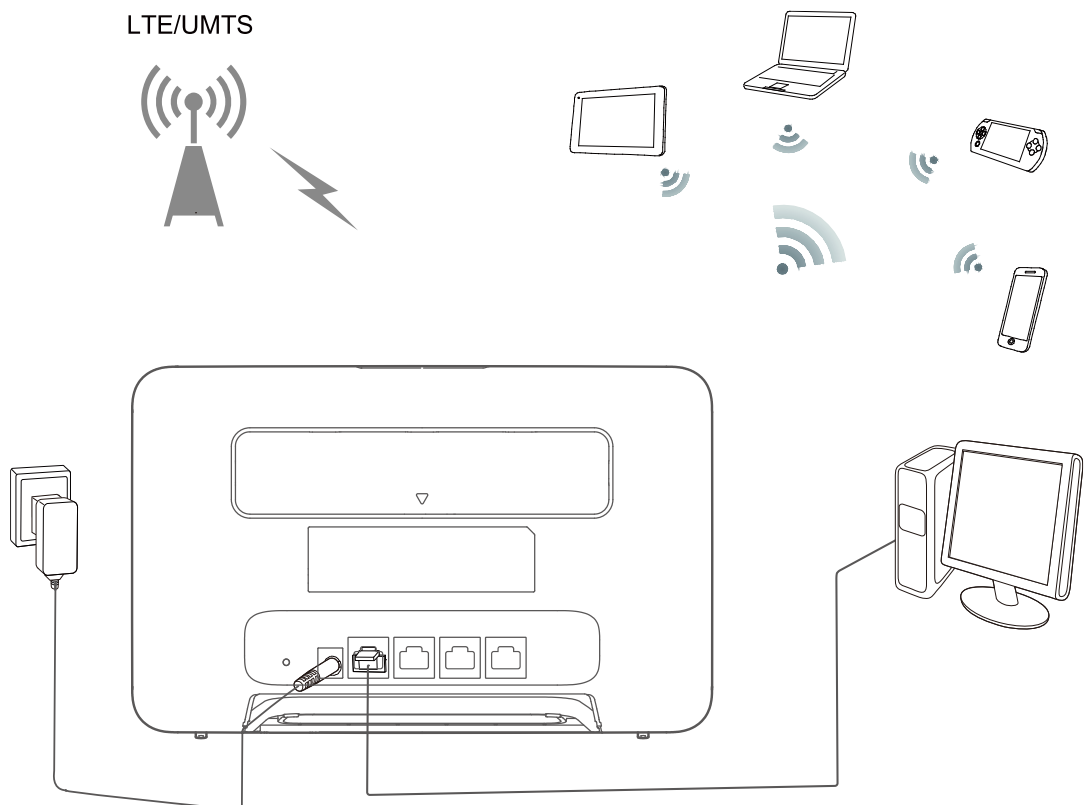

## 3.1.2 Accessing the Internet through an Ethernet Network

The B535-232's LAN/WAN port can be connected to a wall-mounted Ethernet port using a network cable.

**Figure 3-2** Accessing the Internet through an Ethernet network

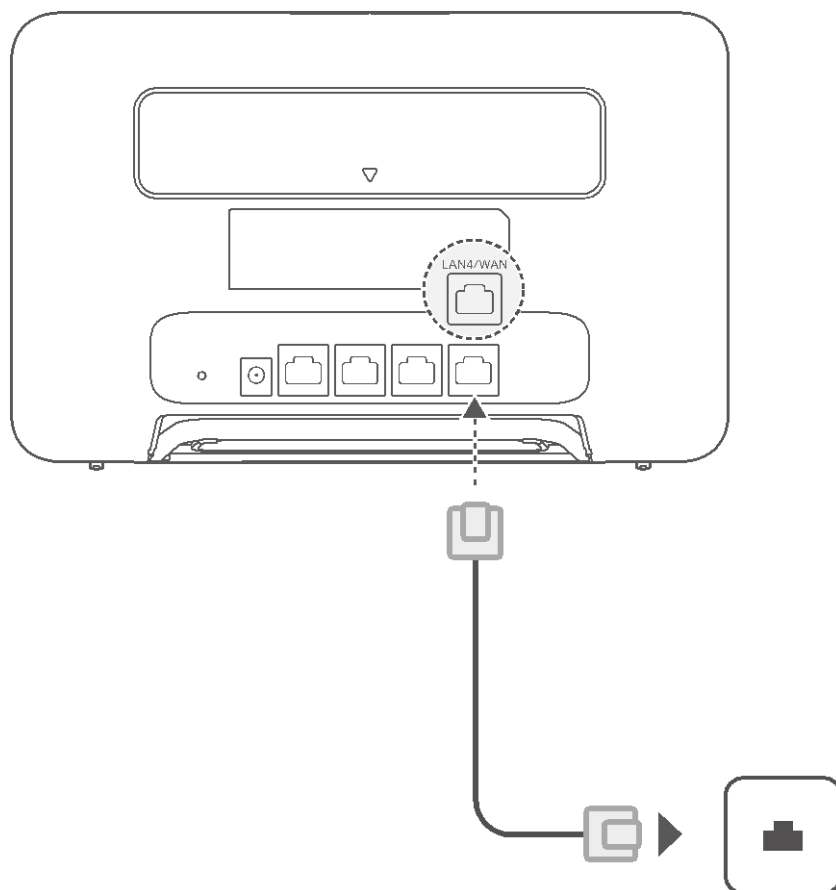

## 3.2 SMS

The B535-232 supports message writing/sending/receiving and group sending (up to 50 -contacts at a time).

## 3.3 Security Service

The B535-232 supports comprehensive and robust security services. It provides a firewall function and PIN protection mechanisms. These features allow users to connect their computers to the Internet and simultaneously protect their computers against security threats from the Internet.

### 3.3.1 Firewall Service

The B535-232 supports the enabling or disabling of a firewall on the network connection, which protects the device and network from attacks by hackers on the Internet and controls access to the Internet.

### 3.3.2 MAC Filtering

The B535-232 supports configuration of the Media Access Control (MAC) address to restrict network access.

### 3.3.3 Wi-Fi Authentication

The gateway supports the following user authentication protocols for Wi-Fi:


- No encryption
- WEP, WPA2-PSK (AES), WPA/WPA2-PSK (TKIP/AES).

## 3.4 VPN Function

### 3.4.1 VPN Client


VPN tunneling involves establishing and maintaining a logical network connection (that may contain intermediate hops). On this connection, packets constructed in a specific VPN protocol format are first encapsulated within some other base or carrier protocol, then transmitted between the VPN client and server, and finally decapsulated on the receiving side.

The B535-232 supports L2TP and PPTP tunneling protocols.

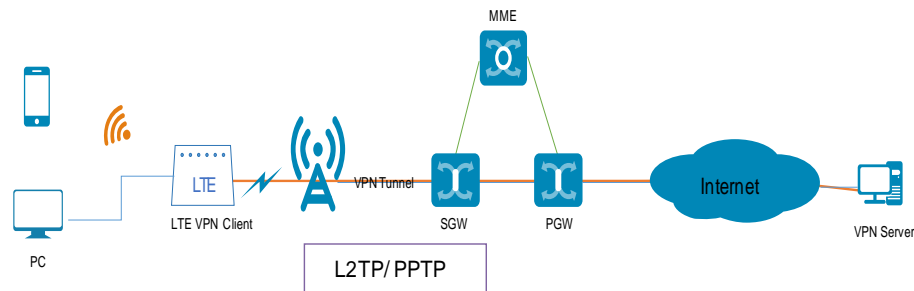


### 3.4.2 VPN Pass-Through

The B535-232 supports L2TP/PPTP VPN pass-through for the LAN side device. The LAN side device can create a VPN tunnel to the VPN server.

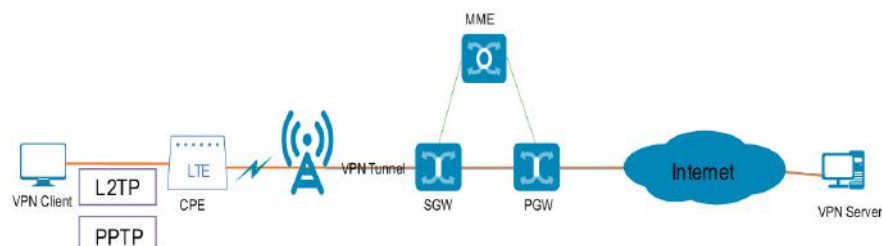

### 3.5 IP Pass-Through


The LTE CPE obtains the WAN IP address and passes it through to the PC (Case 1) or Router (Case 2), and then the PC (Case 1) or Router (Case 2) can directly use the WAN IP address.

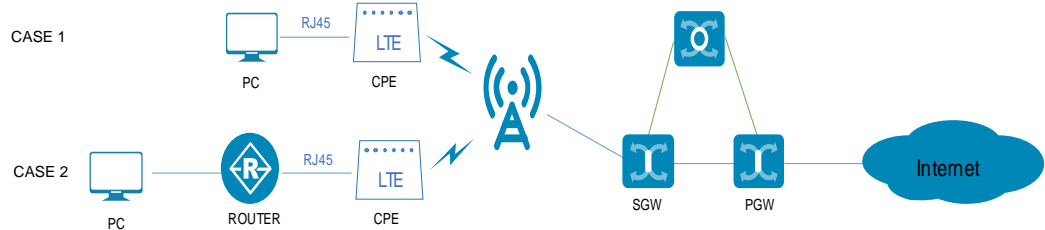

### 3.6 IPv6 Only and IPv4v6 Dual Stack


#### 3.6.1 IPv4v6 Dual Stack

CPE provides dual stack function.

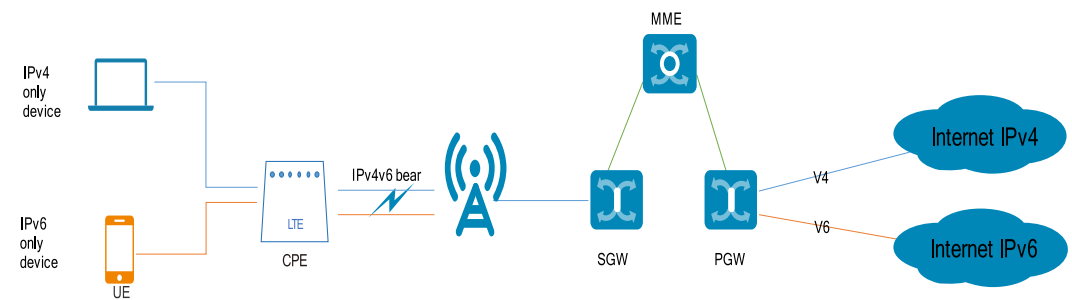

#### 3.6.2 IPv6 Only (CLAT)

The LTE CPE supports IPv6 only with the transition solution CLAT for IPv4 device.

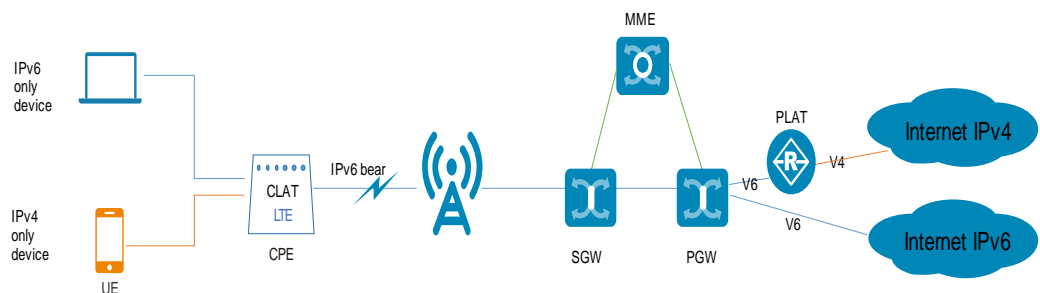

**NOTE**


When the IPv6 only (CLAT) function is enabled, NAT-based functions (like DMZ/Port Forwarding/Port trigger) cannot be used.

When an IPv4 device accesses the Internet, the performance is degraded because packets need to be packetized and unpacked. However, IPv6 devices are not affected.

## 3.7 Multi-APN

The B535-232 supports the establishment and maintenance of two APNs. These two APN connections isolate data and remote management services on an operator's network.

The B535-232 supports an independent APN for CPE internal/TR-069.

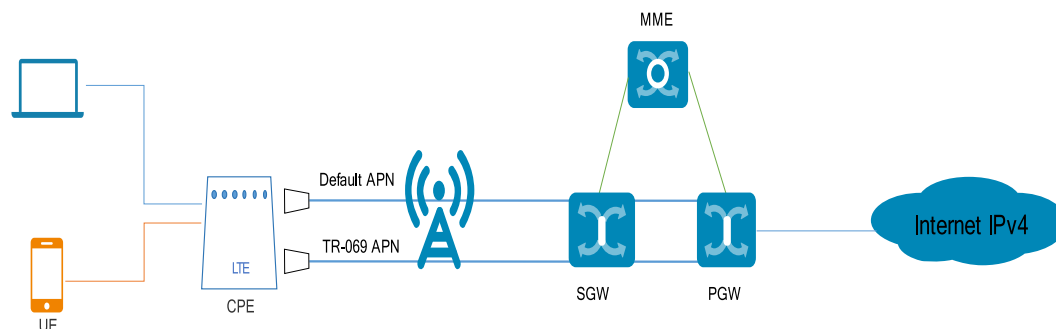

## 3.8 HiLink

- Supports up to 5 HiLink devices to connect to B535-232 through the WPS button to create an expanded network.
- Supports quick connection between a HiLink device (such as Honor set-up boxes and Honor handsets running on EMUI 5.0 and later) and B535-232 through the WPS button.

## 3.9 Customer management

### 3.9.1 WebUI


The B535-232 supports local configuration through the Web UI. You can perform device management and network configuration to ensure normal and stable performance.

### 3.9.2 HUAWEI SmartHome APP

Scan the QR code (can be found in the Quick Start Guide, giftbox and Web UI) to download the Huawei SmartHome APP and configure the router from your phone.

## 3.10 Operator maintenance

The B535-232 supports Operator maintenance through the TR-069. Operator remote manages the CPE software update/parameters configuration via TR-069.

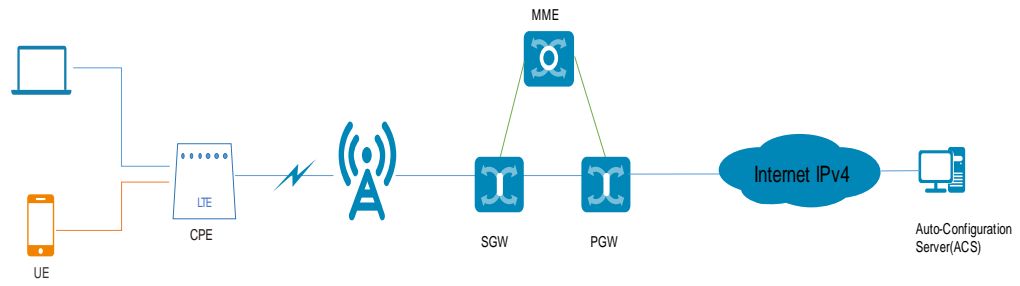

## 3.11 HOTA


The B535-232 supports the HOTA feature, which allows users to remotely update the device firmware through the HOTA server.



# 4 System Structure and Scenario Constraints

## 4.1 System Architecture

Figure 4-1 System structure

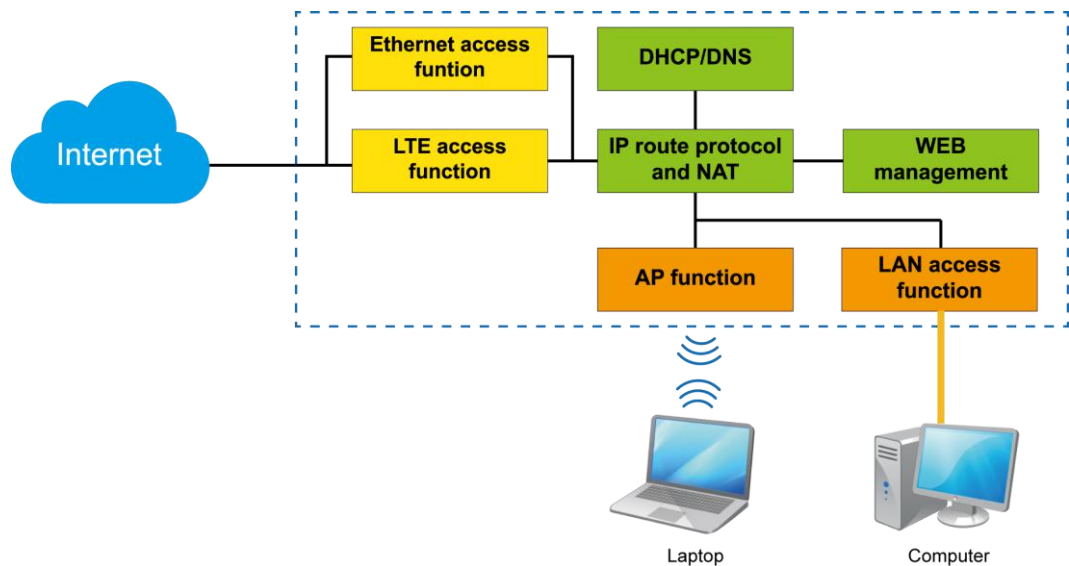

The following describes the modules shown in Figure 4-1.

- LTE access function: The B535-232 adopts the LTE access technology at the WAN side.
- LAN access function: One 10/100/1000 Mbps high-speed Ethernet ports are provided at the LAN side. The B535-232 provides the switching function for local networking and sharing of the broadband network when it is connected to terminal devices.
- AP function: An 802.11b/g/n/a/ac -compliant Wi-Fi AP interface is provided for wireless networking at home. The interface is compliant with the IEEE 802.11b/g/n/a/ac standard and the WEP, WPA/WPA2-PSK, WPA2-PSK security authentication mechanisms.
- DHCP/DNS: The DHCP server dynamically allocates IP addresses to PCs.
- Web-based management: You can configure the B535-232 and modify and view the configuration of the B535-232.

- IP routing protocol and NAT: The B535-232 has high-speed routing capability. With the built-in NAT, the B535-232, together with LTE terminals, can provide flexible broadband access solutions and networking schemes.

## 4.2 Scenario Constraints

The B535-232 is a household wireless broadband access product designed for use in scenarios with relatively few network access devices and relatively low network reliability requirements, such as homes or small office and home offices (SOHOs).

The B535-232 is not an enterprise-grade product. It cannot be used by medium- or large-sized enterprises or in scenarios with high network reliability requirements, such as banks, securities agencies, traffic control, and communications device backhaul.

The B535-232 has the following constraints:

- When the IP Pass-Through mode is enabled, the HOTA function cannot be used.
- When the L2TP/PPTP VPN client function is enabled, the throughput performance will slow down.
- A maximum of 64 devices can be connected to the Wi-Fi in theory; the actual number of devices that can be connected and served depends on actual conditions.

# 5 Technical References

## 5.1 Standards and Communication Protocols

### 5.1.1 Standards and Communication Protocols of the Product

**Table 5-1** Standards and communication protocols of the product

| Item           | Description   |
|----------------|---|
| Physical layer | RFC894  |
| ARP            | RFC826  |
| IP             | RFC791, RFC1122, RFC1071, RFC1141, RFC1624, RFC792, RFC950, RFC1256 |
| ICMP           | RFC792, RFC950, RFC1256   |
| TCP            | RFC793  |
| UDP            | RFC768  |
| DHCP           | RFC1531, RFC1533  |
| NAT            | RFC1631, RFC2663, RFC3022, RFC3027                                  |

### 5.1.2 Standards and Communication Protocols of the Wireless Uu Interface

This device supports 3GPP Release 11.

# 6 Packing List

**Table 6-1** Packing list

| Description          | Quantity | Remarks  |
|----------------------|----------|----------|
| Wireless Gateway     | 1        | Standard |
| Socket               | 1        | Standard |
| Power supply adapter | 1        | Standard |
| Quick Start          | 1        | Standard |
| Ethernet cable       | 1        | Optional |
| Warranty card        | 1        | Optional |

The HUAWEI B535-232 wireless gateway has an optional external antenna.